



SUSTAINABILITY scorecard




XEIKON LX3000 August 2024

Printing conditions
 Speed (5 color mode): 42 m/min
 Width: 330 mm
 Simplex/Duplex: Simplex
 Colorant coverage: 65%
 Colorant: Xeikon QBE toner
 Green energy: NO



17,7g
CO₂/m²

Carbon footprint

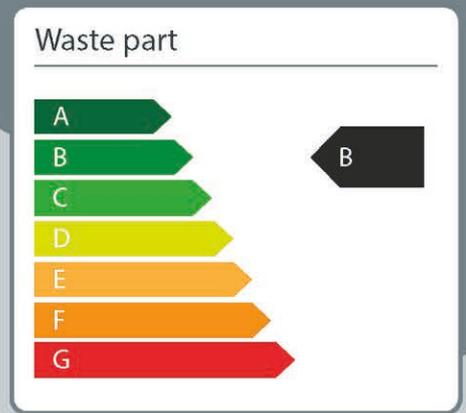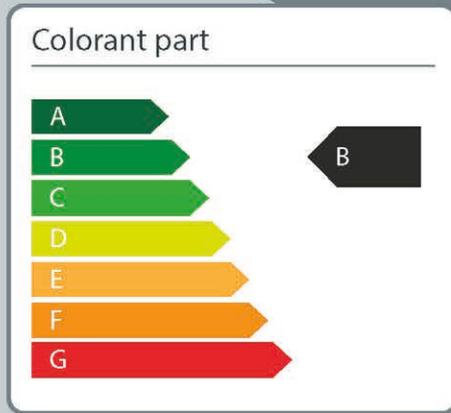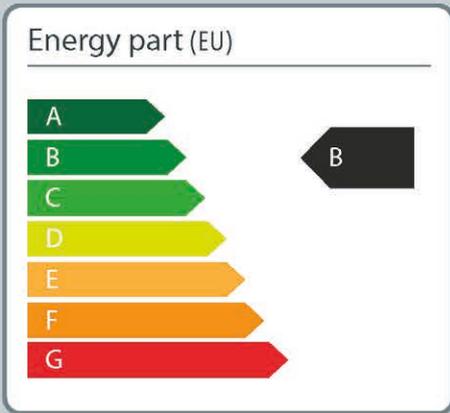

Substance Indicators

Free from

Mineral oil (>C10)	✓
Photoinitiators	✓
Reactive monomers	✓
TPO	✓
Organic PFAS containing (CF _x) _n (x=1,2 or 3, n>1)	✓
Tin	✓
BPA	✓
Latex	✓
Plasticizer	✓
Formaldehyde	✓
(candidate) SVHC	✓

Compliant with

Eupia	✓
Swiss Ordinance	✓
German Ink Ordinance	✓
Californian Prop 65	✓
Nestlé packaging ink	✓
Nestlé packaging material	✓
EU toy safety rules	✓
ROHS heavy metals	✓
De inking foil (Cadel)	✓
De-inking paper (Ingede)	✓
FDA dry food contact	✓

Emissions & output

No VOC during production	✓
No VOC during printing	✓
Only solid waste	✓
C black PAH/FDA	✓
Renewable Carbon % in toner CMYK	59,1%
mg CO ₂ packaging toner	322
Polyester resin	✓



Go here
for more details and downloads



XEIKON MANUFACTURING N.V.
 T. +32 (0)3 443 13 11
 Duwijkstraat 17 - 2500 Lier - Belgium
www.xeikon.com - info@xeikon.com